LEVEL II

AD A094382

DYNAMIC, HOT SURFACE IGNITION OF AIRCRAFT FUELS AND HYDRAULIC FLUIDS

Donald J. Myronuk
San Jose State University
San Jose, California

DTIC
SELECTED
FEB 2 1981
B

October 1980

81 2 02 174

## NOTICE

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture use, or sell any patented invention that may in any way be related thereto.

This report has been reviewed by the Office of Public Affairs (ASD/PA) and is releasable to the National Technical Information Service (NTIS). At NTIS, it will be available to the general public, including foreign nations.

This technical report has been reviewed and is approved for publication.

GREGORY W. GANDEE
Fire Protection Branch
Fuels and Lubrication Division
Aero Propulsion Laboratory

ROBERT G. CLODFELTER
Chief, Fire Protection Branch
Fuels and Lubrication Division
Aero Propulsion Laboratory

FOR THE COMMANDER

ROBERT D. SHERRILL
Chief, Fuels and Lubrication Division
Aero Propulsion Laboratory

19 REPORT DOCUMENTATION PAGE

READ INSTRUCTIONS
BEFORE COMPLETING FORM

1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
AFAPL-TR-79-2095	AD-A094 382	

4. TITLE (and Subtitle)	5. TYPE OF REPORT & PERIOD COVERED
Dynamic, Hot Surface Ignition of Aircraft Fuels and Hydraulic Fluids.	Final rept. Jan 77 — Dec 79
	6. PERFORMING ORG. REPORT NUMBER

7. AUTHOR(s)	8. CONTRACT OR GRANT NUMBER(s)
Donald J. Myronuk	MIPR FY1455-77-00615

9. PERFORMING ORGANIZATION NAME AND ADDRESS	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
NASA Ames Research Center Mountain View CA 94035	P.E. 62203F, Project 3048 Task 304807, W.U. 30480769

11. CONTROLLING OFFICE NAME AND ADDRESS	12. REPORT DATE
Aero Propulsion Laboratory ATTN: G. W. Gandee (AFWAL/POSH) Wright-Patterson AFB OH 45433	October 1980
	13. NUMBER OF PAGES
	40

14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)	15. SECURITY CLASS. (of this report)
	Unclassified
	15a. DECLASSIFICATION DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for Public Release; Distribution Unlimited

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Aircraft	Fire	Fuel	Oil	Temperature
Autoignition	Flame	Heat	Propagation	Tests
Combustion	Flame Holder	Hot Surface	Reignition	
Dynamic	Flammability	Hydraulic	Safety	
Experiments	Fluid	Ignition	Sprays	

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

The dynamic surface ignition characteristics of aircraft fuels and hydraulic fluids were investigated on heated stainless steel and titanium surfaces. Local air flow (0.8 to 50 meters per second) (2.4 to 152.4 ft/sec) effects were measured. Aircraft fuels evaluated on titanium surfaces ignited (25° to 75°C) (77° to 167°F) lower (500° to 600°C) (932° to 1112°F) than values required to ignite the fuels on a heated stainless steel surface. Higher local surface air speeds necessitated higher surface temperatures for ignition of an applied fluid.

DD FORM 1473 EDITION OF 1 NOV 65 IS OBSOLETE

The same trends were noted for hydraulic fluids sprayed on the heated surfaces.

One of the Air Force nonflammable hydraulic fluids, a fluoro alkyl ether, E.6.5, produced by the Du Pont Company could not be ignited on heated surface under any imposed conditions. Another nonflammable candidate, Halocarbon AO-8, from Halarbon Corporation was the second best performer. Without airflow AO-8 ig. ed to produce transitory visible flame sites, at about $750^\circ C$ ($1382^\circ F$); at local air speeds of 1 m/sec (3.05 ft/sec), the surface had to have a temperature value of at least $925^\circ C$ ($1697^\circ F$) to produce a feeble discontinuous flame.

The commonly used commercial airline phosphate ester hydraulic fluid, represented by Skydrol 500b, resisted ignition until surface temperatures approached $725^\circ C$ ($1337^\circ F$) but proceeded to burn quite vigorously at $900^\circ C$ ($1652^\circ F$) at air speeds up to 30 to 40 m/sec (91.4 to 1212 ft/sec).

The standard Air Force hydraulic fluid, Mil-H-5606, a mineral oil type, and the synthetic hydrocarbon based Mil-H-83282 fluid ignited at $575^\circ C$ ($1065^\circ F$), and $500^\circ C$ ($932^\circ F$), respectively. Vigorous burning occurred at $825^\circ C$ ($1517^\circ F$) and $800^\circ C$ ($1472^\circ F$), respectively with air velocity of 30 to 40 m/sec (91.4 to 122 ft/sec). An experimental silicone oil based fluid, MS-6 performed in an unexpected manner. While it resisted ignition at temperatures approaching $900^\circ C$ ($1625^\circ F$) and air velocity of about 10 m/sec (30.5 ft/sec) it would ignite at temperatures as low as $425^\circ C$ ($797^\circ F$) with very low air speeds. An anti wear lubricant added to the silicone oil made the mixture easier to ignite on a hot surface. The phosphate ester and silicone oil based fluids, in the process of thermal decomposition and burning, produced a tenacious tar-like material that adhered to the surface and formed a char or deposit that proceeded to act as its own flame holder. This action resulted in the generation of many additional flame sites and in a nacelle space or wheel-well these could increase the potential for local burn-through and/or structural damage.

FOREWORD

TABLE OF CONTENTS

LIST OF ILLUSTRATIONS

INTRODUCTION

In 1977, the Air Force Systems Command initiated a program for the development of a nonflammable hydraulic fluid for use in future aircraft systems. The overall program is being executed as a cooperative venture between the Aeronautical Systems Division (ASD) and the Air Force Wright Aeronautical Laboratories (AFWAL) at Wright-Patterson Air Force Base in Dayton, Ohio.

Prior experimental investigation, sponsored under this program via NASA-Ames Research Center Grants NSG 2165 and NSG 2219 to San Jose University involved design and fabrication of an Engine Nacelle Fire Simulation Facility. The Facility is being used to experimentally test and quantify the fire behavior of aircraft fuels and hydraulic fluids applied to the heated surface under a variety of dynamic conditions.

The need for cautious interpretation of conventional flammability screening test results, such as auto ignition temperature tests, flame propagation tests, wick tests, hot manifold tests -- (FTM-6053), and spraying fluids at open flames, for categorizing flame resistance of combustible fluids has always been a concern. Consequently, flammability assessment under simulated dynamic environment fire scenario conditions often becomes necessary. The Fire Simulation Facility provides controlled air flow over the heated surface from very low speeds (0.8 m/sec) (2.4 ft/sec) to more vigorous values as high as 50 m/sec (152.4 ft/sec). These ranges encompass air flows which can be encountered in aircraft engine nacelles or wheel-well areas during the take-off or landing. Heated engine component surfaces, hot by-pass air ducts, and frictionally heated wheel/brake assemblies, are potential ignition sources for

1

combustible fluids accidentally released. The ignition would require the pro-
per combination of surface temperature, air flow and local flame holder geometry.

The determination of the temperature values which result in hot surface ignition
of various combustible fluids could be valuable in establishing engineering
design criteria for fire prevention or control in potentially vulnerable areas.

I. OBJECTIVES

The objectives of the experimental study were to (1) design, fabricate and
operate a laboratory sized, engine nacelle-type fire simulator. It would
duplicate the condition of a combustible fluid contacting a heated surface,
ignition and burning in the air flows above the surface. (2) Determine
the minimum temperature for hot surface ignition and subsequent burning
characteristics of conventional aircraft fuels, hydraulic fluids and candi-
date nonflammable hydraulic fluids as influenced by:

    (a)   heated surface material

    (b)   air flow values for dynamic burning conditions

    (c)   fluid application/injection pressures

    (d)   type of fluid leakage -- drips to highly atomized sprays

    (e)   heated surface configurations and surface obstacles

TEST FACILITY APPARATUS AND PERFORMANCE PARAMETERS

I. DESCRIPTION OF FACILITY APPARATUS

A simple laboratory sized engine nacelle fire simulation system built at the Ames Research Center was used to observe contact and ignition of a combustible fluid on a heated surface capable of holding flames while air speeds over the surface ranged from about 0 to 50 m/sec. The Figure 1 shows a schematic overview of the experimentally evolved fire simulator system. Enlarged views of the heated surface and flame holders/surface stagnation zone generators are shown in Figures 2 and 3. Combustible fluids were brought to the heated surface in several ways. They were applied as solid streams or slow dribbles via several capillary tubes leading to each potential flame holder as shown in Figures 2 and 3. The high pressure fluid delivery system was pressurized to 6.9M Pa (1000 psig) with dry nitrogen. Fluids were sprayed through a free-jet, critical flow nozzle into the air flow channel about 1 meter upstream of the fire sites on the heated surface. Under these conditions, there is a freely expanding jet of finely dispersed fluid particles contacting the active heated surface. (A nonexpanding jet or fluid would simply squirt a high velocity stream above the heated surface). Limited testing at injection pressures of 3.5M Pa (500 psig) and 14M Pa (2000 psig) resulted in similar fluid sprays. Therefore, the 6.9M Pa (1000 psig) value was adapted as a reference injection pressure. The final choice for the fire simulator heated surface utilized a one meter long, 7.62 cm diameter schedule 80 stainless steel or titanium pipe internally heated with a premixed propane-air flame. The propane heater has a separate exhaust/ejector system. The target area (the upper outer surface of the stainless steel or titanium pipe) was extensively drilled and threaded to accept 1.3 cm diameter threaded rods. These rods projected 2 cm inward for the pipe surface, into the interior of the pipe. Acting as internal

pin fins, the rods assisted in the conduction of heat from the hotter regions
of the air-propane flame to the pipe outer surface through the pipe interior
insulating boundary layer. Without the interior pin fins, the relatively
low value of thermal conductivity values of stainless steel and titanium
allowed a much more rapid cooling of the target area of the pipe when air
was flowing over the surface and convective surface film coefficients were
high. The fins made it possible to keep the heated target area of the pipe
hot enough to allow a combustible fluid to contact the heated surface and
the local evaporative and convective cooling processes did not significantly
alter the thermal energy transfer to the fluid vapor/air mixture which resulted
in ignition and sustained combustion.

The combination of exterior plate fins which were welded on the target area
to form a V trough (as shown in Figure 2) and the numerous threaded holes in
the pipe upper surface (as shown in Figure 3) served to minimize the pipe
warpage due to enormous thermal stress loads. These "loads" occurred when
the target area was "red-hot" and repeatedly sprayed with the cold, com-
bustible fluid as well as being scoured or cooled by a high speed surface
air flow. In spite of some thermal stress relief of the heated surface, the
thermal shock loads eventually peripherally cracked the pipe. Additionally,
the problem of thermal distortion of the assembly was minimized by using
smoothly curved sections or surfaces for their inherent strength while under-
going rapid thermal expansion or contraction. All sections were laterally
supported yet unconstrained in a longitudinal sense to allow the thermal
breathing of the segments. Air flow over the heater surface were limited to
the upper third of the pipe surface only due to a limited blower size. The
entire heated pipe surface could easily have been swept by a higher volume
air supply.

4

A simple trough, formed by two parallel rods welded to the outer pipe surface, confined the combustible fluid droplets in intimate contact with the heated surface for an adequate period until the combustion processes were established.

A major system design problem involved the selection of appropriate surface stagnation zone generating devices or flame holders. The selection of appropriate flame holders was predicted on the characteristic behavior of fluids igniting on a heated surface. First, the temperature of the surface on which a combustible fluid sprayed or squirted is not dependent on the Autoignition Temperature (AIT) for the particular fluid. The AIT of a flammable liquid is determined in a closed or nearly closed container (usually a borosilicate glass flask). The small quantity of liquid is vaporized in a uniformally heated container and the temperature at which it spontaneously ignites and burns is the AIT. Time lags of a minute or more are frequently involved in the standard method of tests for AITs as described in A.S.T.M.D-2155, Auto-ignition Temperature of Liquid Petroleum Products. For common jet fuels, JP-4, or JP-5, the AIT values lie between 218^O to $232^O C$ (425^O to $450^O F$). Under static, no air flow conditions, the same fuels applied to heated stainless steel surface of the test section, did not ignite until the surface temperature was in the neighborhood of $500^O C$. As air speeds over the heated surface were increased (a slightly more "dynamic" situation), higher surface temperatures were required for ignition.

Initial tests were conducted with room-temperature air velocities in excess of a few meters per second and a visibly red hot e.g. (600 to $700^O C$) stainless steel or titanium surface with no flame holders. It was virtually impossible to ignite the JP-4 fuel by simply spraying it on the hot, smooth

5

surface as a liquid column, as a pre-mixed air/fuel mist, or a high pressure spray. In order to ignite the fuel stream (without any external spark or open flame source), a stagnation mixing region for the combustible mixture of fuel and air was required. This mixture had to be retained in contact with the hot surface for a second or longer to obtain threshold ignition temperatures and continuous combustion of the fuel. Sheet metal strips projecting through the boundary layer of the air flows over the heated surface provided a simple means of generating combustible-mixture stagnation, retention, and ignition zones on the heated surface.

A combination of perforated re-entrant and overlapped, downstream facing cavities or conics were selected for use on the heated surface. A typical section view of the flame holders is shown in Figure 3. The photographs of the surface, Figure 5 and Figure 6, clearly show the surface boundary layer separators, the rails to hold fuel on top of the curved heated surface, the fuel channel tubes to each separator and the surface thermocouples. Small metal troughs discussed in the appendix were located just downstream of the two re-entrant boundary layer separators on the left side of the heated surface photograph. The air flows over the surface from left to right. The second photograph shows an actual flame pattern burning in the open atmosphere. The average air speed over the surface was of the order of 10 meters per second. Combustible fluids were conducted directly into the flame holders at multiple locations. High pressure sprays injected upstream of the flame holders and parallel to the air flow impacted the boundary layer separators and upon passing through the perforations in the holders, came into intimate contact with the heated surface. With the surface temperature at a specific value, the liquids ignited in a repeatable fashion. Figure 4 shows the

6

behavior of JP-4 fuel sprayed onto the heated stainless steel surface with
surface air flow speeds 5 to 50 m/sec. In these tests the fuel did not ignite
immediately upon contacting the heated surface. The liquid first vaporized
and then the air/vapor mixture required adequate contact time with the hot
surface where catalytic agents, carbon and metallic oxides and compounds,
promoted the combustion reaction and finally the formation of visible flames.

Higher air flow velocities created turbulent wakes and eddies. Even with the
flame holders generating stagnation regions on the hot surface, these con-
ditions resulted in significant ignition delay times. If the ignition delay
time exceeded a few seconds at any air flow, the combined effect of local
surface evaporative cooling and enhanced surface convective heat transfer
appeared to prevent air/vapor mixtures in the hot surface boundary layer,
from ever attaining a threshold ignition temperature; no ignition was observed.
Therefore, increasing air speeds required corresponding higher surface tem-
peratures to produce visible flames. Finally, ignition temperatures and air
velocity relationships became quite independent above $850^{\circ}C$ to $900^{\circ}C$ when
JP-4 was used as a fuel. Other fuels and hydraulic fluids behaved in a
similar fashion. The absolute values of the ignition delays were the most
difficult parameter to measure. They could vary by several seconds as sur-
face temperatures were being increased.

The trend of results was very typical for all combustible fluids tested.
The ignition temperature values ($\pm 20^{\circ}C$) were significantly higher than the
AIT values and the increased air flows required surface temperatures in
excess of $1000^{\circ}C$ for ignition of some hydrualic fluids. The nonflammable
AO-8 hydraulic fluids, for example, exhibited transitory visible flames at
low air flows, but when air flows exceeded a few meters per second, the

7

fluids failed to ignite for the maximum surface temperature attainable (about 1050°C).

The following tabulations are representative of the ranges of local conditions that have been experimentally observed in the fire simulation system.

TABLE 1.   RANGES OF OPERATIONAL PARAMETERS FOR EXPERIMENTAL FACILITY

Air Flow:

20°C, 1 ATM Absolute: Velocity - 0 to 50 meters/sec

Mass Flow - 0 to 450 grams/sec

100°C, 1 ATM Absolute: Velocity - 0 to 15 meters/sec

Fluid Delivery:

Range: 0 to 1 liter/min

Atmospheric Pressure: 0 to 0.25 liter/min via capillary tube

High Pressure (6.9 M Pa):   15 to 25 cc/sec via spray injection

Target Area:

Surface Area: 200 cm^2

Material: Stainless Steel 321 or Titanium B 265-58T

Temperature: 1050°C, maximum

Combustible Fluids:

Jet Fuels: JP-4, JP-TS, JP-5, JP-5 + FM9, JP-5+ 0.2% AMI, and Jet A

Hydraulic Fluids: Mil-H-5606, Mil-H-83282, Skydrol 500B

Halocarbon AO-8, Freon E6.5, and MS-6
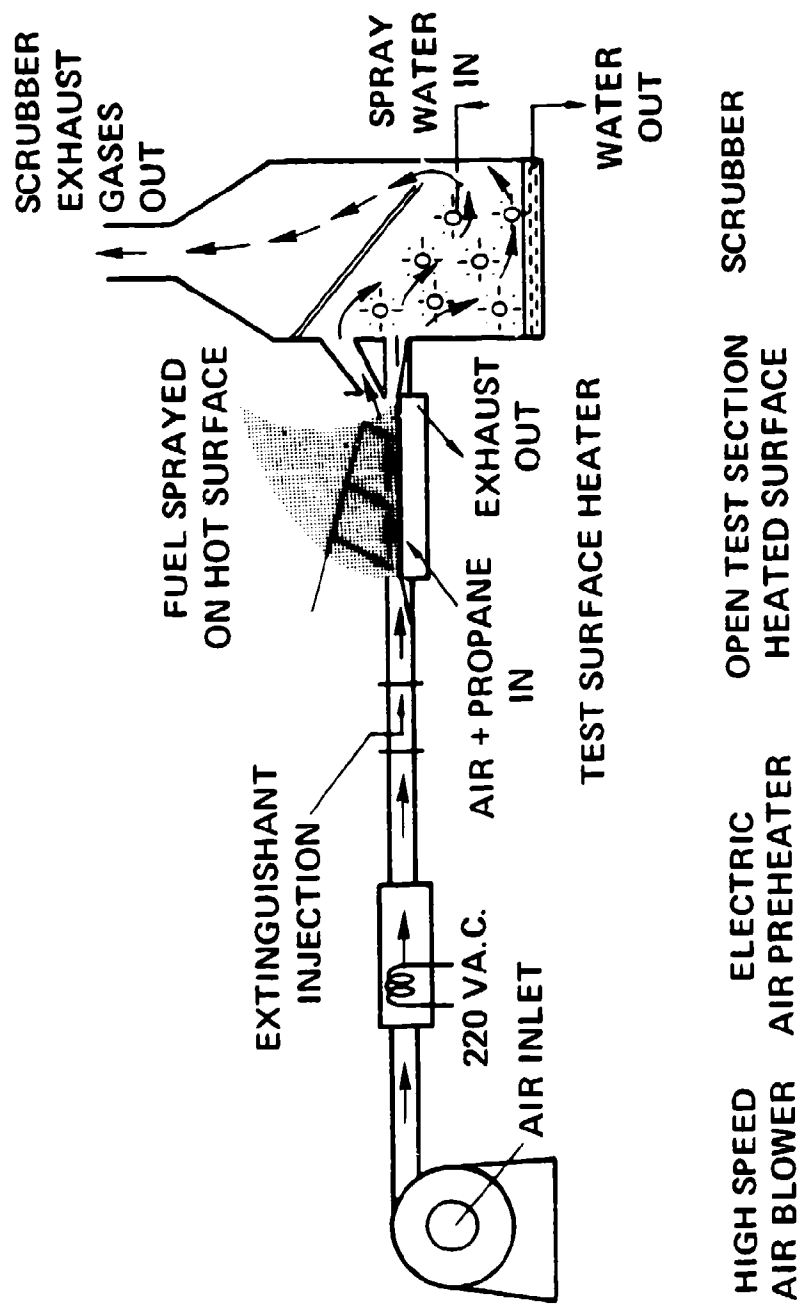
FIGURE 1 SCHEMATIC OF SIMULATOR FOR NACELLE FIRES

9

BOUNDARY LAYER SEPARATORS & FLAME HOLDERS

THERMOCOUPLES

RAILS TO HOLD FUEL ON HOT SURFACE

FUEL TUBES
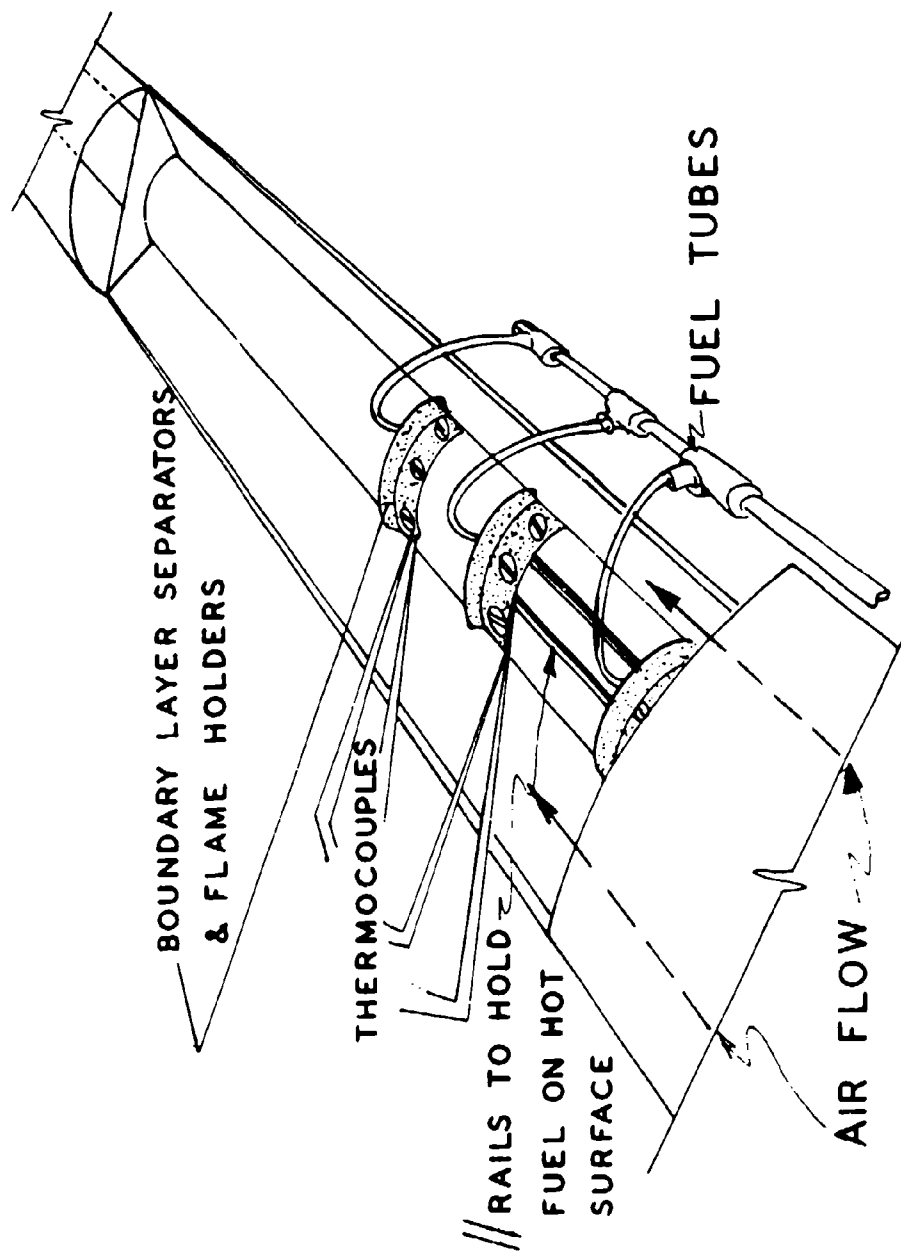
AIR FLOW

FIGURE - 2   ENLARGED VIEW OF HEATED SURFACE

WITH MULTIPLE FIRE SITES

FIGURE-3   SCHEMATIC SECTION OF FIRE SIMULATOR HEATED SURFACE

11
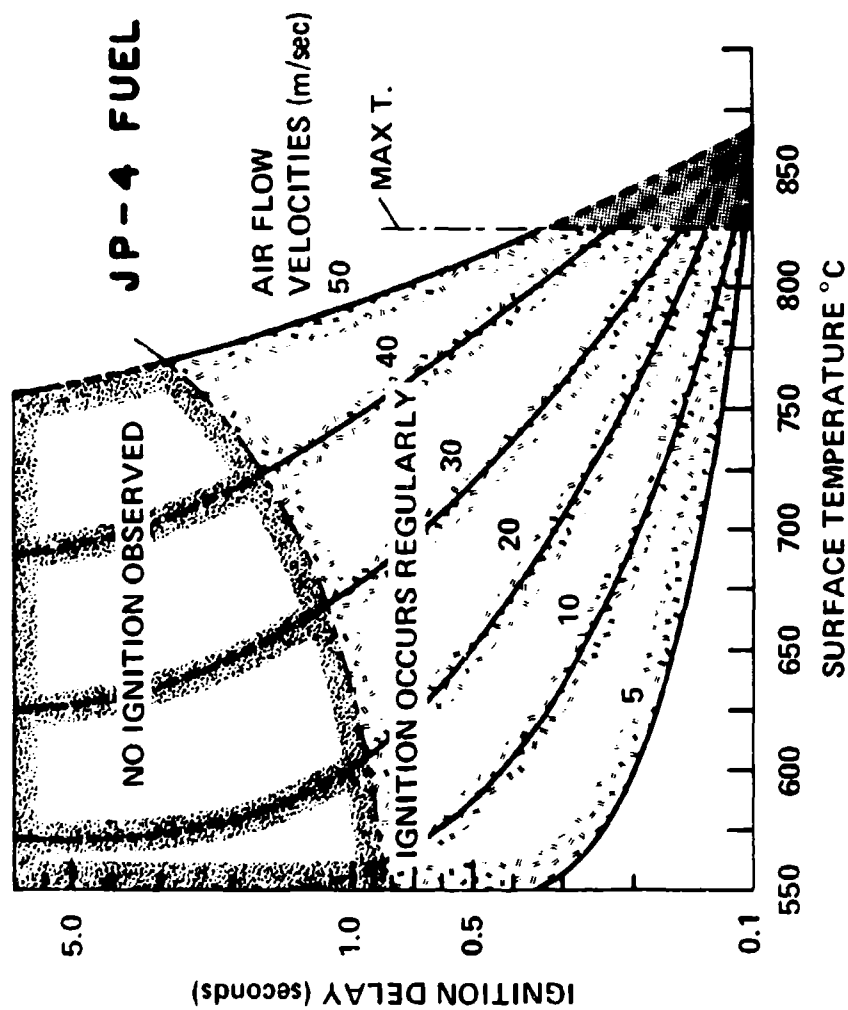
FIGURE 4 HOT SURFACE IGNITION TEMPERATURE
VS IGNITION DELAY TIMES WITH AIR
FLOW SPEED AS A PARAMETER

12

FIGURE 5   PHOTOGRAPH OF FACILITY HOT SURFACE SHOWING
FLAME HOLDERS AND FUEL DELIVERY TUBES

13

FIGURE 6 PHOTOGRAPH OF FACILITY HOT SURFACE WITH JP-4 FUEL BURNING IN AN AIR FLOW (AIR SPEED APPROX. 10 M/SEC)

14

GENERAL PROCEDURES USING HIGH PRESSURE SPRAY INJECTION

I.   INJECTION PRESSURES AND SURFACE PARAMETERS OBSERVATIONS

All injected fluids were sprayed through a precalibrated critical flow
nozzle located about 1 meter upstream of the flame holders. A driving
pressure of about 6.9M Pa (1000 psig) was used. The divergent free jet
of atomizing liquid was observed to encounter the boundary layer separators/
flame holders attached to the heated surface. The combustible sprays ignited
when, as a function of the local surface air speed, the heated surface
temperatures were adequate to initiate the combustion processes. At each
channel air speed (0.8, 6, 16, 23 and 36 meters/sec), the temperature of
the surface was slowly increased to reach the ignition threshold values.
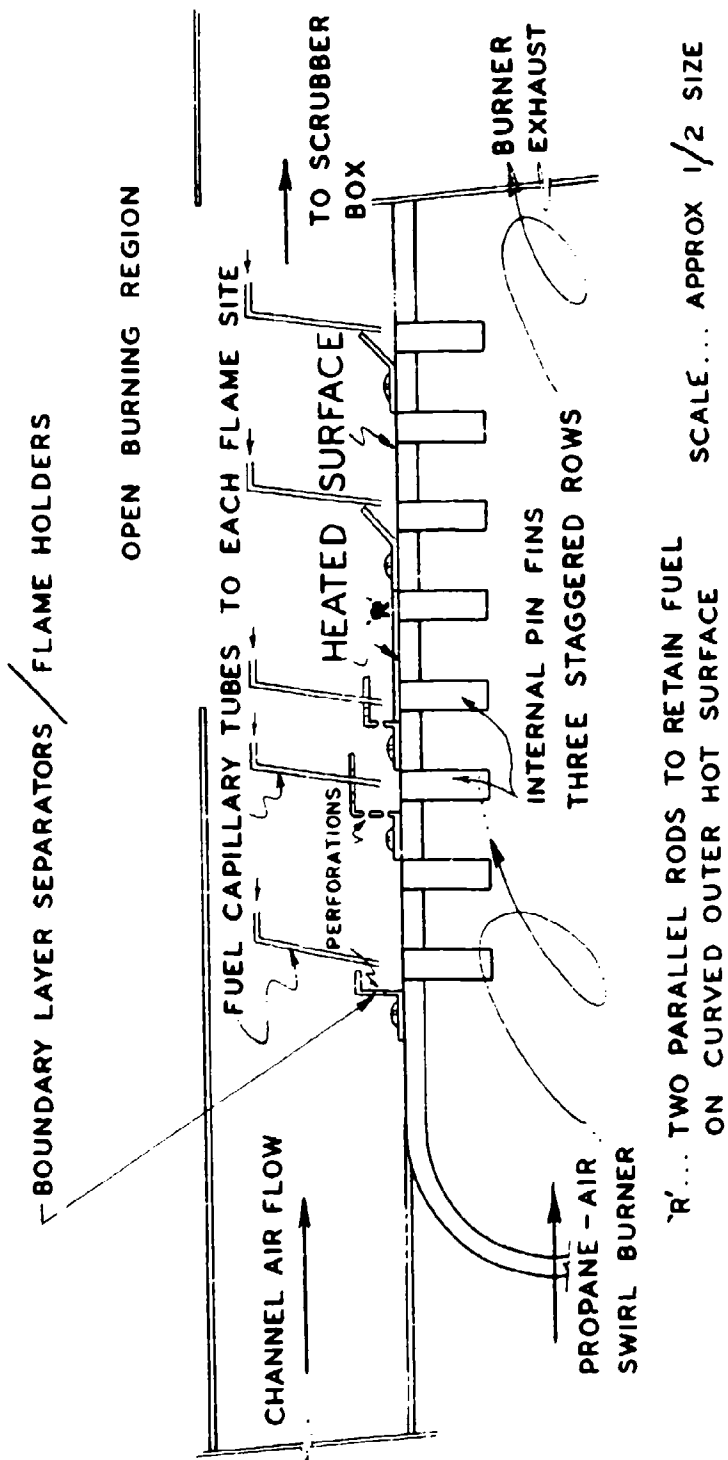The heated surface of the Simulator, fabricated from austenitic stainless
steel type 321, was given the general designation of "Heated Stainless Steel
Surface" on the graphical results. An identical heated surface was fabricated
from titanium (B265-58T) and results using this surface material were desig-
nated "Heated Titanium Surface" on the graphical results.

Approximately 15 cubic centimeters of the fluids passed through the nozzle
during the injection period. An electronic timer was used to trigger the
high pressure pneumatically activated control valve feeding the nozzle hence
quantities of fluid injected were very repeatable. During the calibration
period for a particular fluid, the ease with which the expanding jet formed
a spray and the amount of air entrainment to form a foam was noted. The
rate at which the foam coalesced was also noted. These observations pro-
vided assurance that the free jet of expanding fluid mist did indeed contact
the heated surface and the boundary layer separators. Resulting vapors were

15

well mixed with air and ignition on the heated surface, providing the mixture
was combustible in the first place, did indeed occur in a repeatable fashion.

EXPERIMENTAL RESULTS AND DISCUSSION

I. AIRCRAFT FUELS AND HYDRAULIC FLUIDS

The Ames Fire Simulation Facility has been used to observe the ignition charac-
teristics of a wide variety of fuels (JP-4, JP-5, Jet A, JP-TS and JP-5 plus
anti-misting additives AM-1 and FM-9). Hydraulic fluids included Mil-H-5606,
a mineral oil; Mil-H-83282, a synthetic hydrocarbon; Skydrol 500B, a phosphate
ester; MS-6, an experimental silicone fluid; and nonflammable candidates
Halocarbon AO-8 and DuPont E 6.5.

The nonflammable fluid E6.5, described as a fluoro-alkyl ether, did not
ignite under any circumstances encountered in the facility. The Halocarbon
fluid produced only the sparcest flickers of yellowish flame when ignited
by the heated surface. The results also include data and discussions on
another experimental silicone oil based fluid, MS-5 (similar to the MS-6)
as well as the potential loss of ignition/fire resistance of the silicone
based fluids caused by an additive (DBC, dibutylchlorendate) used for improve-
ment of the load carrying capability of the hydraulic oil film.

Figure 7 is a semi-logarithmic plot of ignition temperatures for a variety
of aircraft fuels igniting on a heated stainless steel surface as a function
of surface temperature and average channel air speed. Ignition delays in
general were of the order of one or two seconds. The fluids were applied
in a one second burst of spray. The precalibrated volume applied was about
15 cubic centimeters. If ignition delays were longer than one or two seconds,
the fuel droplets that arrived at the surface would simply have boiled away

16

on the hot surface with forming visible flames. As shown, the higher the volatility of the fuel, the more difficult it was to ignite on the open heated surface. Fuels like the more volatile JP-4 would tend to form a vapor more readily than the lower volatility fuel JP-TS. With the presence of an air stream, a combustible vapor-air mixture would be formed in many regions of the flow field. However, for high volatility fluids, it appeared that these regions were well away from the source of thermal energy, and did not acquire sufficient energy to yield a self sustaining combustion process.

Less volatile fluids evaporating less rapidly on the heated surface, produced local vapor air mixtures nearer to the source of thermal energy and they in turn ignited at lower temperatures. The very non volatile silicone oils for example, ignited at surface temperatures lower than any other hydraulic fluids tested. Hence, from a design safety point of view, when combustible fluids accidentally contact a heated surface, the more volatile fluid may represent less of a hazard than the lower volatility candidates. With basic design criteria in mind, however, the results pointed out the limitation using AIT values as absolute upper limits for heated surfaces in nacelle spaces. More specifically if JP-5 fuel with an AIT of about $232^{o}F$ were to be used in an engine whose hot air bypass ducts were expected to reach $260^{o}C$, current design safety requirements specify isolation of the hot surfaces from potential fuel contact to avoid ignition of the fuel. Yet the experimental results show it was not possible to ignite the JP-5 fuel on a surface whose temperature was less than $500^{o}C$ let alone $260^{o}F$. These tests were very low air flows; at higher local air speeds hot surface ignition values were even more remote from the AIT values. These results further suggested that when the safety aspects of ignition of

17

fuels on a heated surface were considered, design v lues for <u>unprotected</u> heated metal surfaces could <u>exceed</u> the maximum AIT value by 75 to 100°F with no problems. This would eliminate unnecessary insulation weight currently being used to thermally isolate hot ducts in nacelle spaces and hot engine surfaces. An interesting observation involved the use of JP-5 with anti misting (AM) additives. In the first case, the addition of 0.2% AM-1 additive actually reduced the ability of the fuel to resist hot surface ignition by about 50°C. Yet considering the ability of the additive to prevent accidentally released fuel from misting (and obviously being more easily ignited by <u>external</u> local sources) by enhancing surface tension effects and inhibiting droplet formation, these same effects were precisely those needed to promote easier dynamic hot surface ignition of a fluid. The use of another anti misting agent, FM-9, with JP-5 fuel did not result in as great a lowering of the hot surface ignition temperature value of the JP-5 (about 10 to 15°C). It is possible the ability of an additive to lower the threshold hot surface ignition temperature of a fuel may be a simple way to measure its ability to perform as an effective anti misting agent. (On the basis of this suggestion the AM-1 should perform as a better anti misting agent than the FM-9 additive.)

When the jet engine fuels were sprayed over the heated titanium surface, in general the temperatures required to ignite the fuels were of the order of 50 to 75°C lower than for the heated stainless steel surface. These results shown in Figure 8 confirmed the similar trend of behavior observed when using small titanium boats or troughs as reported in the Appendix A-1. For the titanium surface, the trend of increased temperature required for ignition as a function of local air speed was similar to the trend established on the stainless steel surface. Figure 9 demonstrates the average performance bands

18

for fuels on the two hot surface materials. With the increased usage of
titanium in modern aircraft, especially in nacelle spaces and wheel wells,
a more rigorous test of a combustible fluid's ability to resist hot surface
ignition must include testing on heated titanium surfaces. This test would
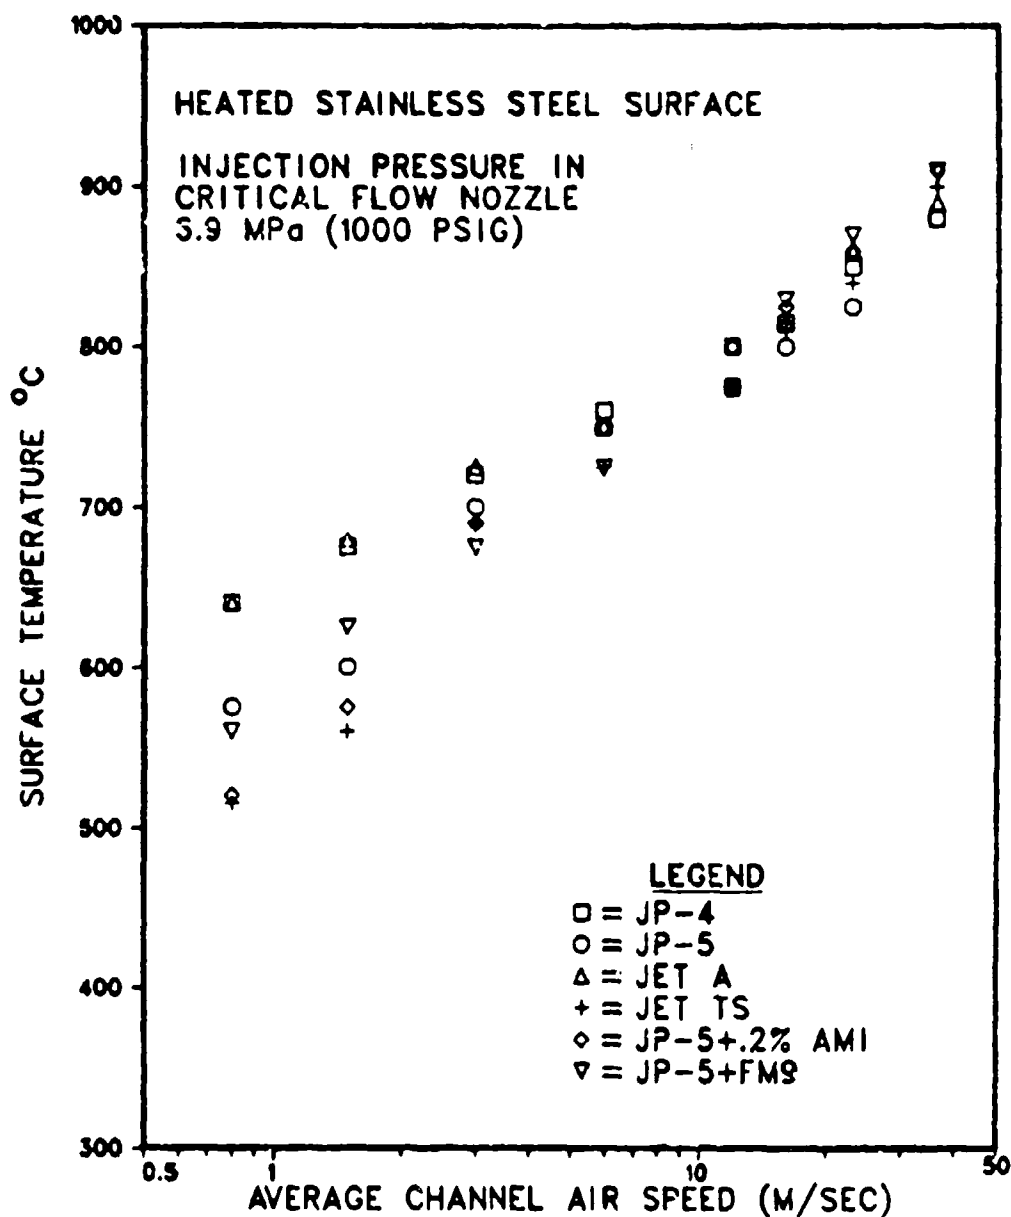be particularly applicable to hydraulic and lubricating fluids as well as
fuels.

FIGURE 7   AIR SPEED AND SURFACE MATERIAL EFFECTS
ON
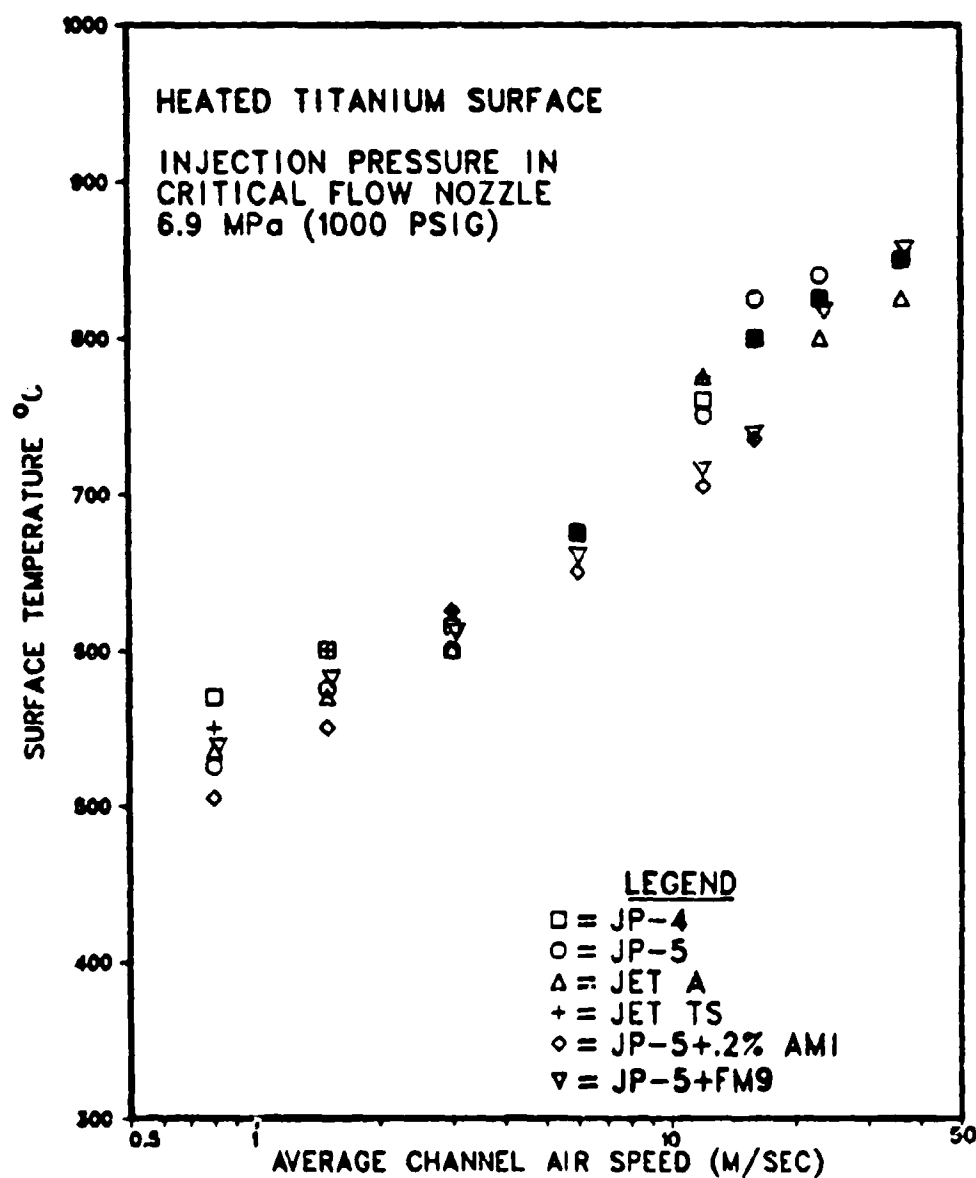HOT SURFACE IGNITION TEMPERATURE
OF
AIRCRAFT FUELS

FIGURE 8   AIR SPEED AND SURFACE MATERIAL EFFECTS
ON
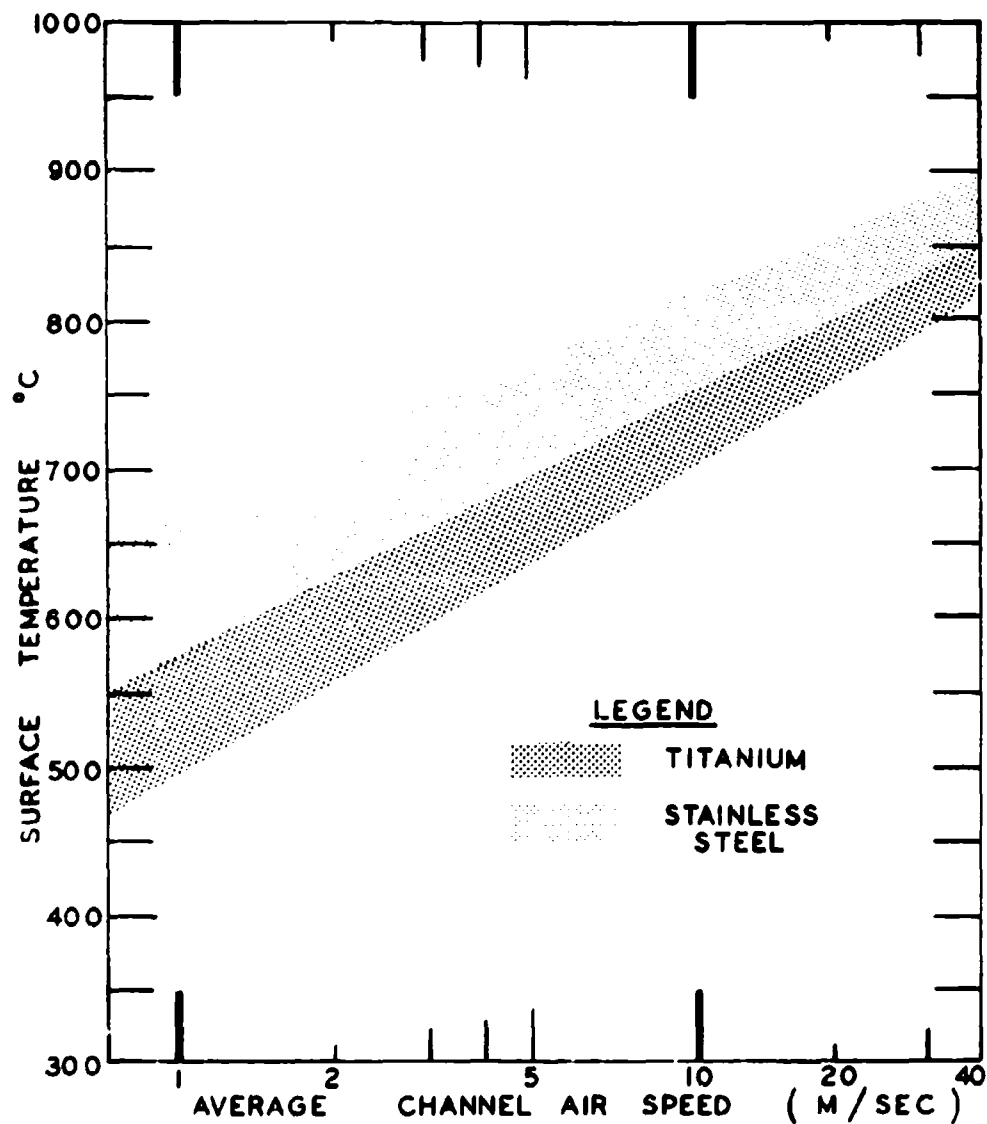HOT SURFACE IGNITION TEMPERATURE
OF
AIRCRAFT FUELS

21

FIGURE 9 AIR SPEED & SURFACE MATERIAL EFFECTS
ON
HOT SURFACE IGNITION TEMPERATURE
OF
AIRCRAFT FUELS

The results of hydraulic fluids spray-injected into the air flows upstream of the heated surface exhibited a considerably broader range of results as shown on figures 10 and 11 for the different surface materials. As may be observed, the combustible liquids appeared to ignite at somewhat lower temperatures on a heated titanium surface compared to ignition temperature values on the stainless steel surface. Enhanced catalytic activity of the heated titanium surface compared to the catalytic activity of the stainless steel surface appears to be the primary reason for this behavior.

The synthetic hydrocarbon based fluid, MIL-H-83282, had a higher auto ignition temperature than MIL-H-5606 (338°C vs 225°C) and by virtue of these values, the MIL-H-83282 may be considered as being more flame resistant than MIL-H-5606. However, for these test conditions, as figure 10 data shows, the MIL-H-83282 ignited easier than the MIL-H-5606 (500°C vs 575°C for 5606 at low air speeds; 800°C vs 825°C for 5606 at the highest channel air speeds.) The data reflects that 83282 was more flammable than 5606 from a hot-surface-contact ignition point of view. This was one of several instances that revealed a significant potential error in assuming flammability characteristics could be simply extrapolated from AIT data. The Silicone oil based fluids (AIT about 410°C) yielded unexpected results. While they appeared to resist ignition for surface air speeds above 10 meters per second and surface temperatures about 900°C, at low air speeds they ignited at about 425°C. While MS-6, tetrachlorophenyl methyl silicone oil, was more flame resistant than another silicone fluid (dichlorophenyl methyl silicone oil) it appeared the presence of different quantities of an anti wear additive tended to reduce the hot surface ignition resistance of these very low volatility oils even more than for the base fluids alone. This problem is discussed in further detail later in this report.

The most widely used commercial airline hydraulic fluid is a phosphate ester as represented by Skydrol 500 B. At about 700°C at low air flows it burned quite sparsely, yet as temperatures and surface air speeds increased, the 500 B burned very vigorously. For the silicone oil and the phosphate ester fluids, there was notable ignition delay following spray injection -- at least 3 or 4 seconds. In this period, the clear liquid droplets thermally decomposed into dark-colored tarry liquids. The secondary products then acquired enough thermal energy to burn with visible flames. The tarry liquids appeared to cling tenaciously to any available surfaces in the test section where they acted as their own flameholders. Projections of silicone dioxide from the burned MS-6 or char from decomposed 500 B littered the entire heated test section. Subsequent fluid injections were trapped in these growing inert deposits where they proceeded to burn vigorously in the self-generated flame holders. This is particularly noteworthy in that vigorous flame sites with potential for local burn-through and/or structual damage could occur at engine nacelle locations or smooth duct areas that were nor- mally free of local fire sites by virtue of the vigorous local air flows that swept away ordinary combustible liquids. The 500 B liquid characterized as a "self-extinguishing" liquid when a nigh pressure spray plume was sub- jected to an open flame, or the silicon oil characterized as "does not ignite under the same circumstances really did not behave in those fashions in the hot surface ignition facility. This serious behavior discrepancy was due to the fact that for spray over an open flame, the fluids had no time to undergo the change to the secondary tar-like fluids that could burn vigorously. On the heated surface adequate time was available for the thermal decomposition and subsequent vigorous combustion. For both fluids small visible flame sites continued to erupt on the heated surface many seconds after the one second injection period and initial burst of flame. These post injection

24

eruptions were very visible in the 16 mm motion pictures taken of the test sequences.

The Air Force nonflammable candidate fluid, Halocarbon AO-8, was very resistant to ignition on a heated surface. At low air speeds, 0.8 meters per second, the applied liquid or spray resisted forming visible flames until the hot surface temperature reached 750°C. The resulting flame burned very sparcely and randomly within the vapor space above the heated surface. The flames were highly localized, and did not display any tendency to ignite any adjacent vapor pockets in any continuous type of flame front. This behavior of the AO-8 to resist forming continuously burning vapors persisted even with surface temperatures in excess of 1000°C. While there were a few more of the flame pockets at the higher temperature, the flames were not visibly different from the initial flame flickers. At air speeds above 1 m/sec, the AO-8 ceased to produce visible flames. On the titanium surface, as shown on Figure 11, the AO-8 burned with sparce visible flames for a higher range of air speeds. Flickers were observed with air speeds up to 10 meters/second. It was suspected chlorine stripped from the AO-8 molecules and reacted with the heated titanium oxides to catalyze the combustion reaction to a greater degree than in the case of AO-8 contacting the heated stainless steel surface.

A truly fire resistant fluid, the Air Force nonflammable candidate, DuPont E 6.5, a fluoro-alkly ether, did not yield a visible flame under any circumstances in the test facility. At most a grey-white vapor/smoke cloud was released following contact of the spray on the hot surface.
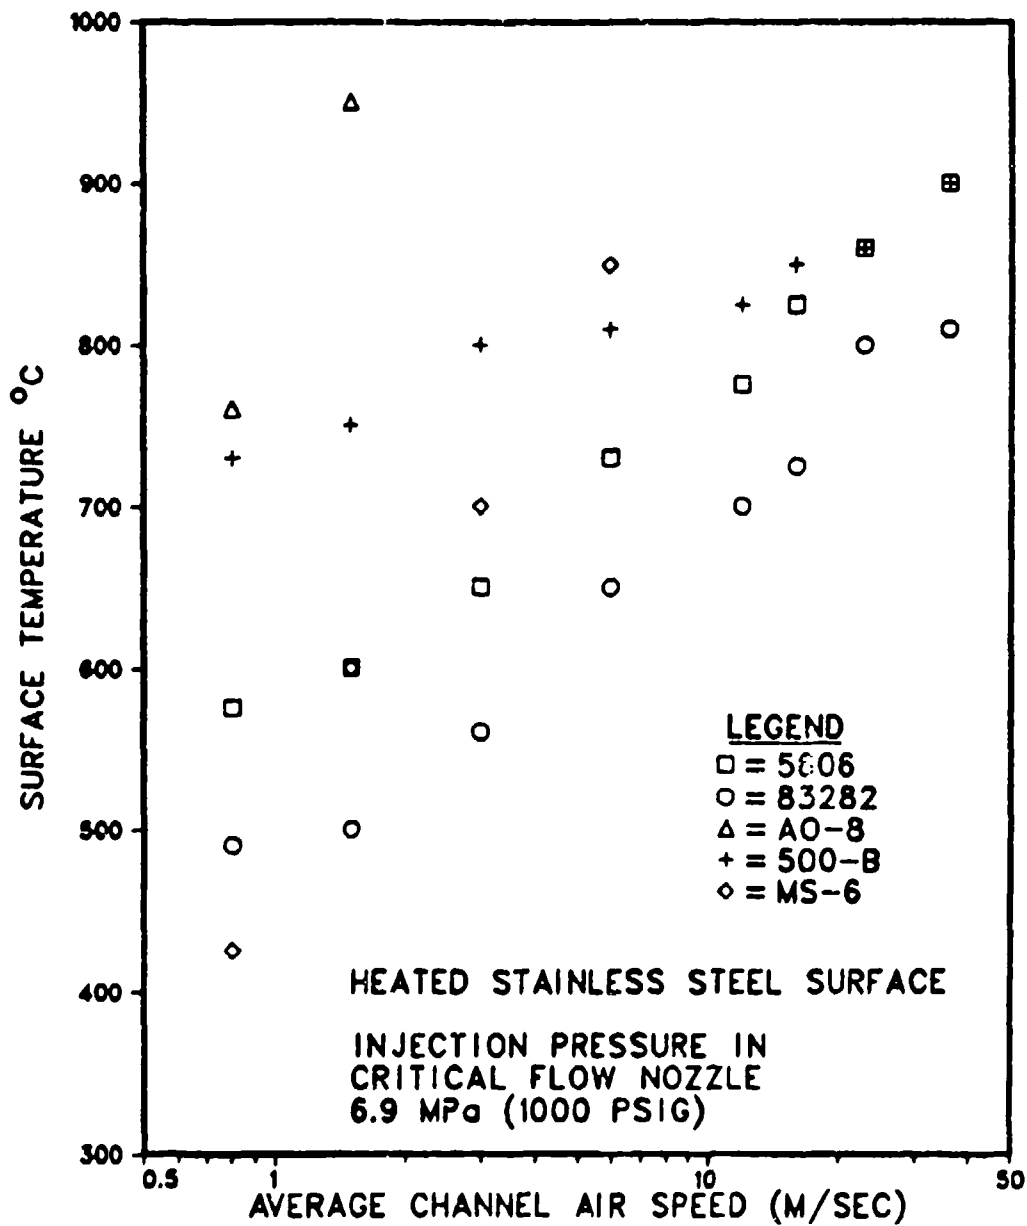
FIGURE 10   AIR SPEED AND SURFACE MATERIAL EFFECTS
ON
HOT SURFACE IGNITION TEMPERATURE
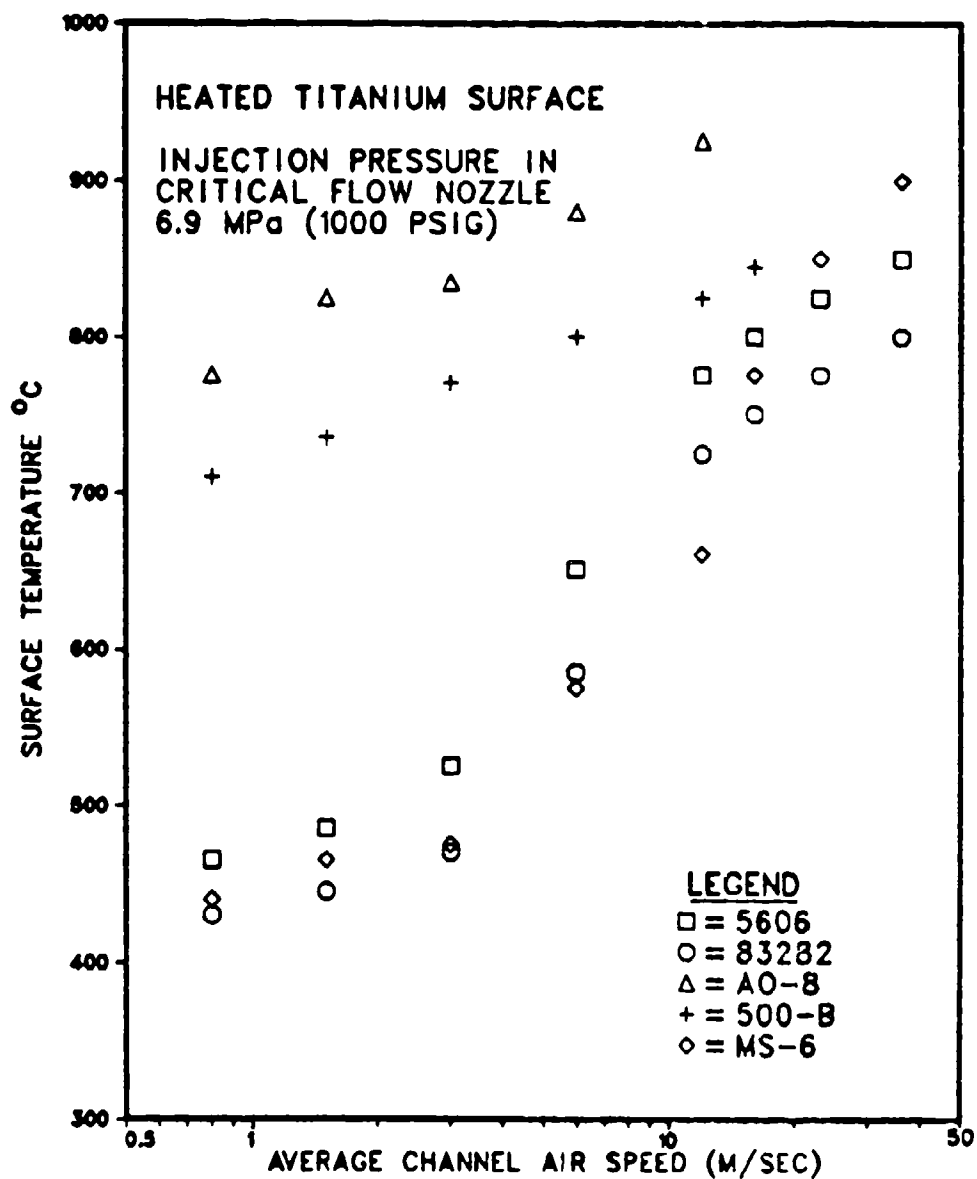CF
AIRCRAFT HYDRAULIC FLUIDS

FIGURE II AIR SPEED AND SURFACE MATERIAL EFFECTS
ON
HOT SURFACE IGNITION TEMPERATURE
OF
AIRCRAFT HYDRAULIC FLUIDS

27

II.   REDUCTION OF FIRE RESISTANCE OF SILICONE OILS BY AN ANTIWEAR ADDITIVE

Figure 12 yields results of some experimental work with silicone oil based hydraulic fluids. The M.S.-6 fluid consisted of tetrachlorophenylmethyl silicone oil base plus 4% dibutyl chlorendate, (DBC), as an anti wear additive. It was noted the base fluid was more fire resistant than the mixture. The same behavior was noted for the MS-5 mixture (dichlorophenylmethyl silicone oil plus 10% DBC) and the MS-5 base alone. The DBC alone ignited at 350°C at low air speeds as shown. In brief, the data on figure 12 indicated a need to be very cautious when mixing additives in hydraulic fluids. While the DBS enhanced anti wear performance of silicone oils, at the same time the addition had inadvertently altered and reduced a salient feature of the fluid, the ability to resist hot surface ignition.

In general air speeds higher than 5 meters per second the silicone oil based fluids demonstrated good resistance to ignition on a heated surface.

HEATED STAINLESS STEEL SURFACE

INJECTION PRESSURE IN
CRITICAL FLOW NOZZLE
6.9 MPa (1000 PSIG)

LEGEND

□ = MS 6 (4% DBC)
○ = MS 6 BASE
△ = MS 5 (10% DBC)
+ = MS 5 BASE
◇ = DBC (DIBUTYLCHLORENDATE)

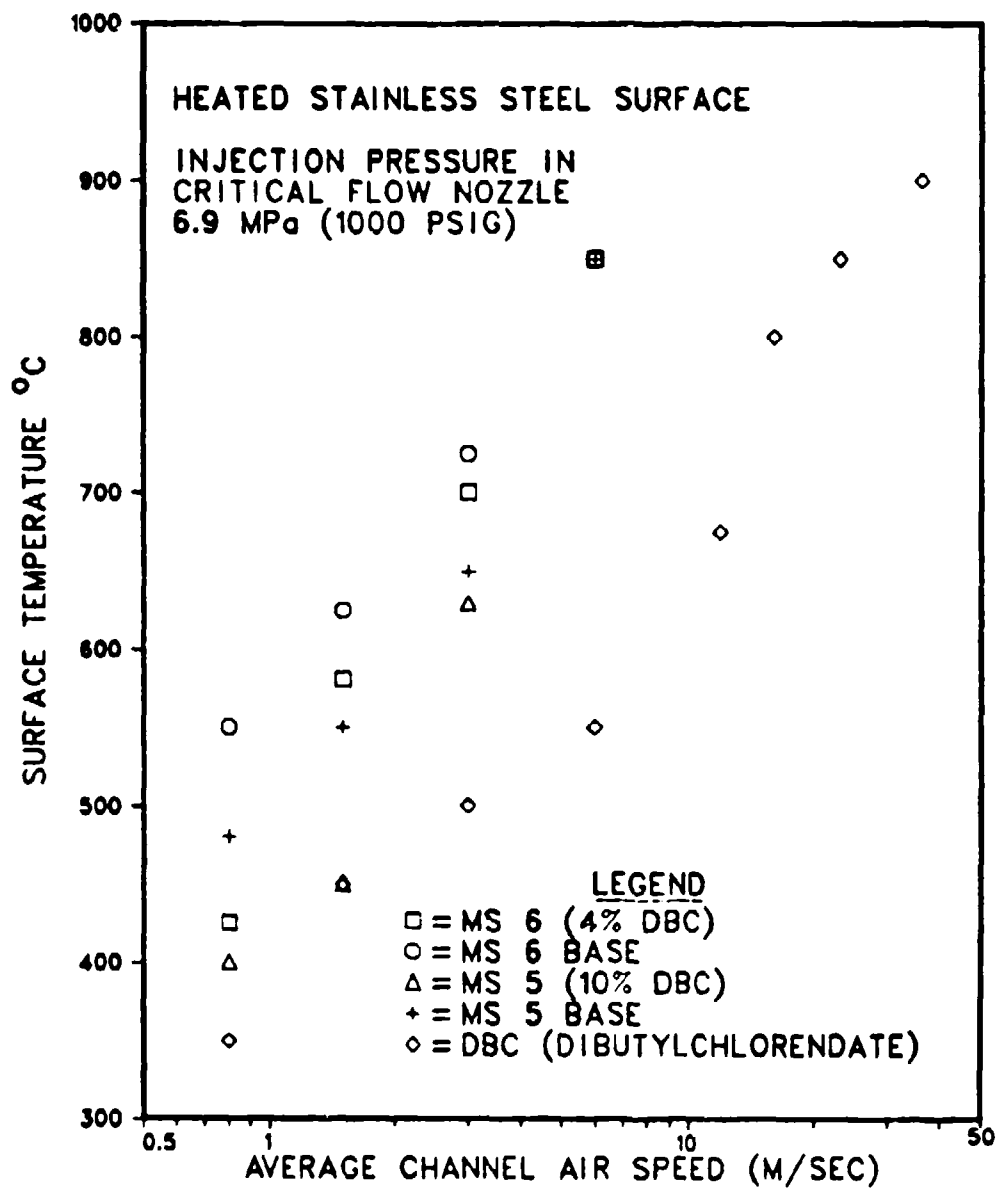SURFACE TEMPERATURE °C

AVERAGE CHANNEL AIR SPEED (M/SEC)

FIGURE 12   AIR SPEED EFFECTS
ON
HOT SURFACE IGNITION TEMPERATURE
OF
SILICONE BASE FLUIDS AND ADDITIVES

CONCLUSIONS

1. From a design safety viewpoint, the ignition temperature of a combustible
fluid on a heated surface with some local air flows over the surface, cannot
be extrapolated or even inferred from the Auto Ignition Temperature Value
for the fluid.

2. With simple air flows over a heated surface, a more volatile fluid applied
to the surface was more difficult to ignite (it required a higher local
surface temperature) than a much less volatile combustible liquid.

3. Dynamic conditions (definable local air flows) must become a major
parameter in tests used to ascertain the fire resistance ability of a com-
bustible fluid.

4. The Halocarbon AO-8 demonstrated a high degree of resistance to ignition
on a heated surface. While some very sparse flames did occur, they did not
show any tendency to ignite adjacent vapor pockets. With local air flows
above a few meters per second it was virtually impossible to ignite the
fluid on the heated surface.

5. The fluid E6.5, a fluoroalkylether, did not produce visible flame under
any imposed circumstances hence would be labelled totally fire resistant.

6. The "fire resistant" phosphate ester hydraulic fluids, while demonstrating
an initial resistance to hot surface ignition, upon reaching a threshold
ignition temperature of the order of 750°C, burned with extreme vigor. When

30

ignited the phosphate ester as well as the silicone based fluids presented additional complications by forming their own flame holders and thus allowed vigorous combustion processes to occur in regions where due to high local air flows, potentially combustible mixtures would normally have been swe,.t away.

7. Additives to improve a feature of a fuel (anti misting) or hydraulic fluid (anti wear) must be carefully investigated as to their potential deterioration of the ability of the fluid to resist ignition on a heated surface.

8. Hot surface ignition of combustible fluids occur at lower surface temperatures in general (25 to 75°C less) for heated titanium surfaces as compared to stainless steel surface.

9. A measure of the capability of a particular metal alloy to promote hot surface ignition of a combustible fluid may be ascertained by observing ignition behavior of the fluid on a small heated trough (the technique is described in the appendix of this report).

RECOMMENDATIONS

1. In aircraft hydraulic fluid applications, it appears that a significant improvement in fire safety can be achieved by simply changing to another fluid in regions where fire risk is high. Further investigations should be considered in the feasibility of two fluid hydraulic systems, e.g., using a very fire resistant fluid like Halocarbon AO-8 in the hydraulic lines only in the immediate vicinity of the wheel well brake assemblies. Conventional fluids would be used throughout the remainder of the hydraulic system.

2. Federal Test Standards Number 791, Method 6052 investigating High Pressure Spray Ignition and Number 791, Method 6053 investigating Hot Manifold Drip Ignition Temperatures should be modified to include local air flows, 0 to 30 meters per second, as one of the imposed test conditions.

REFERENCES

Information and/or suggestions from the following references have been used
to provide directions for the experimental portions of this report.

1. S. R. Riccitiello et al, "Conference on Hydraulic Fluids: A Compilation
   of Presentations and Papers", NASA Report TMX -73, 14Z. August 1976.

2. A Strasser, N. C. Waters, J. M. Kuchta, "Ignition of Aircraft Fluids by
   Hot Surfaces Under Dynamic Conditions", WPAFB/Report/AFAPL, TR-71-86,
   November 1971.

3. "Standard Test Method for Autoignition Temperature of Liquid Petroleum
   Products", ASTM D 2155-66, Annual Book of ASTM Standards, Part 24 1976.

Other test methods reviewed were ASTM D-92 for Flash and Fire Points;
FTS-791-6052 using a high pressure spray; AMS-3150 C using a low pressure
spray; and MIL-H-83282 to establish flame propagation properties of combustible
fluids.

APPENDIX

In initial experimental work, the nacelle fire simulator system was employed
as a simple heater for small metal troughs (4 cm by 1 cm) into which a
small quantity of JP-4 fuel was intermittently injected via a hypodermic
needle system. The trough temperature was slowly increased until visible
flames were observed. The trough was located in the wake of one of the
boundary layer separators fastened to the simulator heated surface; and
while the trough was fully exposed to the local atmosphere, the air flow
rate over the small trough was regulated from about 0 to about 4 meters
per second in this preliminary investigation. The fur' was added in small
drops so as to avoid excessive evaporative cooling of the trough surface.
Two chromel-alumel thermocouples were spring-loaded against the trough to
ensure good contact with the trough surface as well as holding it in place
on the main heater surface.

The following sheet metals were used to fabricate the troughs for the
initial hot surface ignition observations:

    stainless steel 304
    stainless steel 321
    carbon steel, 1040
    aluminum, 2024
    chrome moly alloy, 4130
    titanium alloy, 9046
    inconel X 750
    pure molybdenum

The following behavior trends were noted. The aluminum trough at very low air
flows structurally sagged and melted <u>prior</u> to an observed ignition of the JP-4
fuel on the heated aluminum surface (average trough temperature was about 620°C).
Stainless steels and ordinary carbon steel had a hot surface ignition threshold
temperature of about 575°C which rose, as shown on figure A-1 as the air flow
speed over the metal trough was increased. The titanium alloy demonstrated

34

a significantly lower hot surface ignition capability at low air flows as
did the inconel X material. With regards to the mechanics of igniting JP-4
the titanium alloys appeared to be capable of igniting combustible liquids
at temperatures at least 50 to 100°C below those required for hot surface
ignition of JP-4 on a stainless steel alloy.

It was believed that part of the explanation for the behavior of these alloys
involved the formation of surface catalysts in the form of oxides of the
parent metal, iron, nickel, and chromium, on the heated surfaces. Some
confirmation of this opinion was given by the behavior of a pure molybdenum
surface as well as a chrome-moly alloy as shown on figure A-1. The initial
formation of a molybdenum oxide on the clean moly surface lead to a quite
low (470°C) surface ignition temperature. However the initial, easily
melted oxide was rapidly evaporated and in its place was observed a yellowish
trioxide with a definite crystal structure that rapidly formed a thick
coating which now acted as a thermal resistance and in turn effectively
insulated the metal surface from the applied fuel. The temperature required
for hot surface ignition after the formation of the yellow trioxide layer
then exceeded the temperature required for JP-4 ignition on stainless steel.

For stainless steels and inconel X, the formed oxides or spinels (e.g.
$(FeO)_{0.25}(Cr_2O_3)_{1.75}$) were quite stable and while protecting the heated
surface from further oxidation they proceeded to catalze the combustion
reaction of fuel contacting the surface. For heated titanium surface,
the oxide layer formed is much thinner, and the catalytic ability of the
oxide layer coupled with a reduced thermal insulation resistance apparently
enhanced the capability of Titanium to ignite JP-4 fuel on the heated trough
surface. The slight differences in thermal conductivity values between the

35

Titanium and Stainless steel were not sufficient in themselves to justify the difference in ignition behavior. As air velocitie: increased, the hot surface ignition temperature for stainless steel approached about 800°C for air speeds in the order of 40 meters per second; a similar value was noted for titanium.

These very preliminary results for alloys other than stainless steels pointed out the necessity of considering surface material metallurgical properties as yet another parameter in the general investigation of hot surface initiated, nacelle-type fires. Two avenues of additional investigation were indicated by these results:

(i) easier ignition on a simple titanium boat implied a greater potential safety hazard could be present on a prototype heated surface made of titanium rather than stainless steel. This resulted in construction of a full-sized titanium heated surface for the fire simulator.

(ii) the results of burning combustible fluids on simple indirectly heated boats of different alloys (including high temperature alloys like Inconel, Rene 41, Inco 601, Udimet 700) could be used to predict with reasonable accuracy, the ignition behavior of much larger size heated surfaces of the same materials under more dynamic conditions. The initial results of ignition of JP-4 on stainless steel and titanium boats at low air speeds and the subsequent results on the larger prototype fire simulator surface yielded good probability of success of such predictions.

A full size titanium alloy heated surface was constructed for the Fire Simulator System and the specified fuels were sprayed over the heated surface. As initially indicated by the simple titanium boat test, the

36

combustible fuels did indeed ignite and burn at <u>lower</u> temperatures (50° to 75°C lower on the average) than the same fuels contacting a heated stainless steel surface. The experimental data of figure 7 graphically supports these conclusions. Figure 7 depicts ignition performance bands fuels ignited on the two heated surfaces with average surface temperature and average surface air speeds over the surface boundary layer projections as parameters.

When hydraulic fluids were injected into the air stream the same trend prevailed -- a combustible fluid ignited at lower temperatures on a heated titanium surface.

The potential application of using small inexpensive boats of special alloys to ascertain behavior of larger more expensive and geometrically complex surfaces of the same material was made evident by the data of figure A-2. Actual tests were possible using the simple boats and the full size stainless steel and titanium surfaces fabricated for the Ames Fire Simulator System. The boats were located in a relatively quiescent region just downstream of the major re-entrant boundary layer separators and were surrounded by a layer of ceramic wool to prevent vapors from sweeping off the boat and being ignited on the heated surface below or adjacent to the boat. The local surface air flows in general served to maintain a good supply of air such that for the drops of fluid carefully placed with a hypodermic syringe onto the boat surface, when they evaporated, the air-vapor mixture approached stoichiometry and burned with visible flame after having been <u>ignited by the heated boat surface</u>.

There was no doubt the boat results graphed on figure A-2 coupled with a simple temperature displacement factor could have been employed to predict the behavior of JP-4 sprayed at high pressure over a full sized heated

37

surface. At higher average air speeds (hence higher surface temperatures required for ignition), results for the two full sized surfaces converged. Of greater importance, however, was the lower average air-speed/fuel-ignition threshold values; conditions that would result in ignition of a fuel accidentally released and contacting heated surfaces with their stagnation zones so commonly found in actual nacelle spaces.
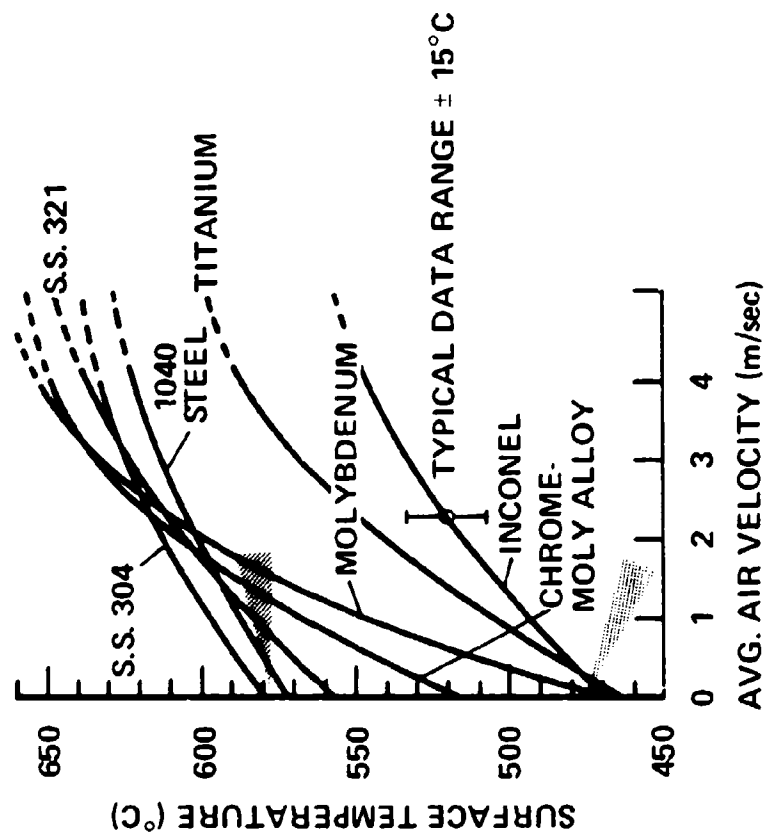
FIGURE A1 HOT SURFACE IGNITION TEMPERATURE FOR J.P.–4 AS A FUNCTION OF MATERIAL AND AIR FLOW
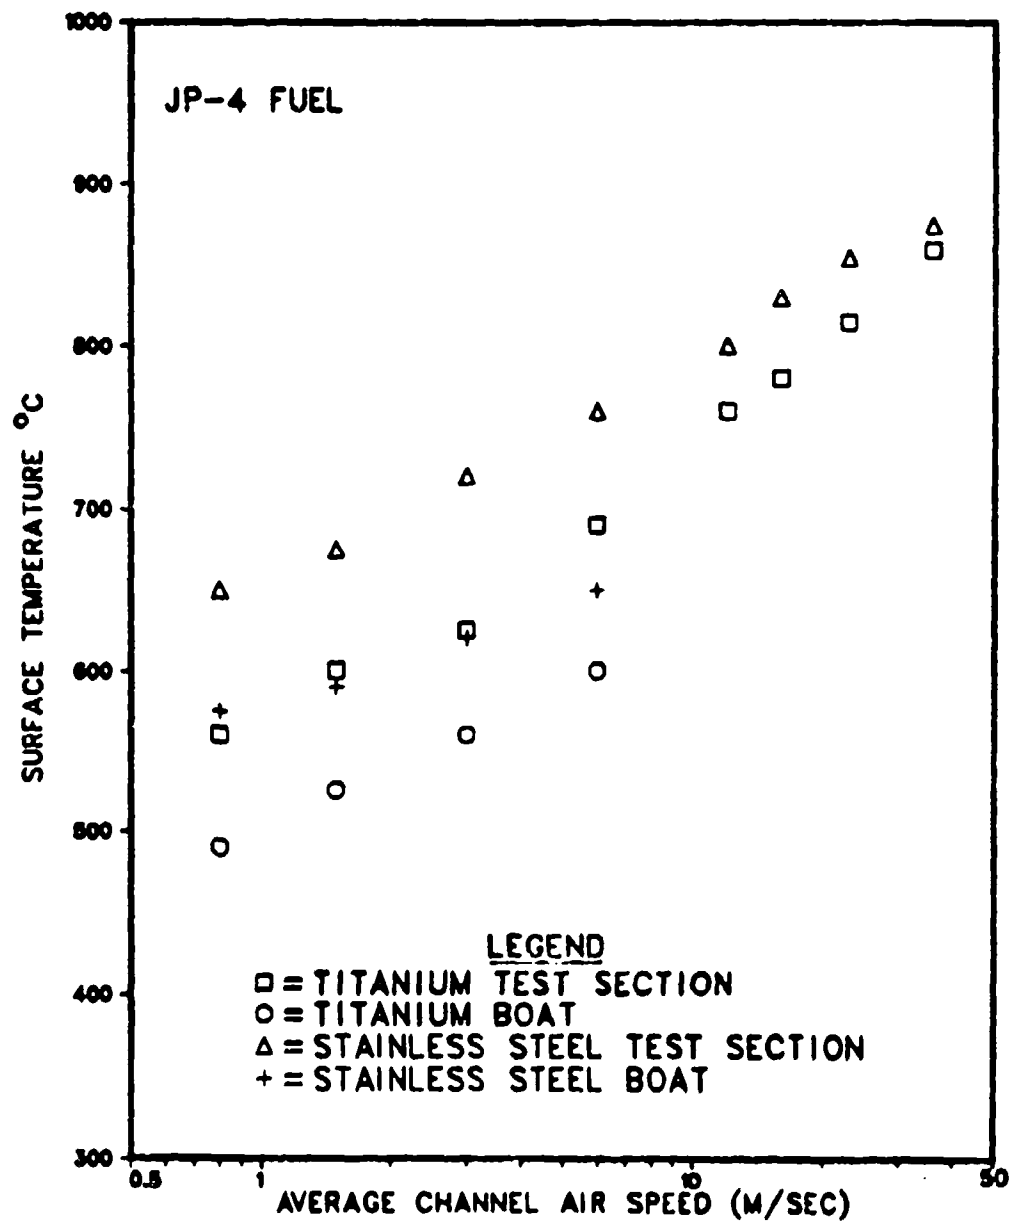
FIGURE A-2 AIR SPEED AND SURFACE MATERIAL EFFECTS
ON
HOT SURFACE IGNITION TEMPERATURE
OF
AIRCRAFT FUELS

40